

---

Dou WB, Li DF, Lu YJ, Yu XL, Roskilly AP. [Evaluation of ideal double-tank hybrid pneumatic engine system under different compression cycle scenarios](#). *Energy Procedia* 2017, **142**, 1388-1394.

#### DOI link

<https://doi.org/10.1016/j.egypro.2017.12.524>

#### ePrints link

[http://eprint.ncl.ac.uk/pub\\_details2.aspx?pub\\_id=245914](http://eprint.ncl.ac.uk/pub_details2.aspx?pub_id=245914)

#### Date deposited

09/02/2018

#### Copyright

© 2017 The Authors. Published by Elsevier Ltd under a Creative Commons [license](#)

#### Licence

This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International licence](#)





9th International Conference on Applied Energy, ICAE2017, 21-24 August 2017, Cardiff, UK

## Evaluation of ideal double-tank hybrid pneumatic engine system under different compression cycle scenarios

Wenbo Dou <sup>a</sup>, Daofei Li <sup>a,\*</sup>, Yiji Lu <sup>b,\*</sup>, Xiaoli Yu <sup>a</sup>, Anthony Paul Roskilly <sup>b</sup>

<sup>a</sup> Department of Energy Engineering, Zhejiang University, Hangzhou, 310027, China

<sup>b</sup> Sir Joseph Swan Centre for Energy Research, Newcastle University, Newcastle, NE1 7RU, UK

---

### Abstract

A double-tank hybrid pneumatic engine system, with one low pressure tank and one high pressure tank has been proposed to improve the energy conversion efficiency and auxiliary braking power output of regenerative braking of vehicles. The performance of three ideal compression cycle scenarios for the double-tank system has been investigated and the results are compared with that of ideal one-tank scenario in order to identify the optimal compression cycle under different primary performance requirements. Results indicate the maximum brake mean effective pressure can be improved to not over 0.2 MPa less than the HP tank pressure and the highest improvement of total air mass recovered can reach over 40% utilising the double-tank scenarios. Scenario 3 performs the best at the braking power output ability, while scenario 4 shows the greatest high pressure compressed air recovery potential. Considering about the LP tank air sources, scenario 2 is the only one that can operate independently without other air complements, which also performs the best at the energy conversion efficiency among the three double-tank scenarios.

© 2017 The Authors. Published by Elsevier Ltd.

Peer-review under responsibility of the scientific committee of the 9th International Conference on Applied Energy.

*Keywords:* regenerative braking, hybrid pneumatic engine, double-tank compression cycle scenarios, energy efficiency analysis

---

---


\* Corresponding author. Tel.: +86 (0) 159 9001 4454 (D Li); +44 (0) 191 208 4827 (Y. Lu)

E-mail address: [dfl@zju.edu.cn](mailto:dfl@zju.edu.cn) (D. Li); [yiji.lu@ncl.ac.uk](mailto:yiji.lu@ncl.ac.uk); [luyiji0620@gmail.com](mailto:luyiji0620@gmail.com) (Y. Lu)


## 1. Introduction

Regenerative braking technology draws increasing attentions because of the urgent demand to improve the energy efficiency of conventional Internal Combustion Engine (ICE) [1-3]. Hybrid Pneumatic Engine (HPE) system is one of the available approaches, having the advantages of lightness, simplicity, pollution-free and low cost, that attracts researchers to study [4-6]. The conventional ICE can be easily adopted as a compressor by modifying the ICE valve system, which can also run the ICE as an air motor by changing the valve timing [7, 8]. The energy of the compressed air can also be used for supercharging system or supplying other pneumatic accessories [9-11]. Most previously proposed and studied hybrid pneumatic systems are focused on the one-tank system, which is easy to be fully filled and therefore limits the energy storage capacity. Several researchers proposed to use double-tank system to improve the system performance [12, 13]. However, the optimal compression cycle strategy using double-tank system has not been comprehensively studied and analysed. And the energy recovering improvements and braking effect improvements are required to be evaluated. In this paper, a double-tank hybrid pneumatic engine system based on the conventional one-tank system is proposed. Three ideal compression cycle scenarios for the double-tank system are described, analysed and compared in order to identify the optimal compression cycle scenario under different system demands.

## 2. System concepts

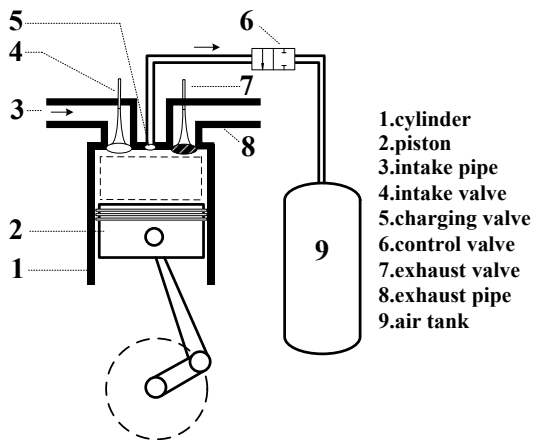

**Fig.1.** Schematic diagram of a one-tank HPE system

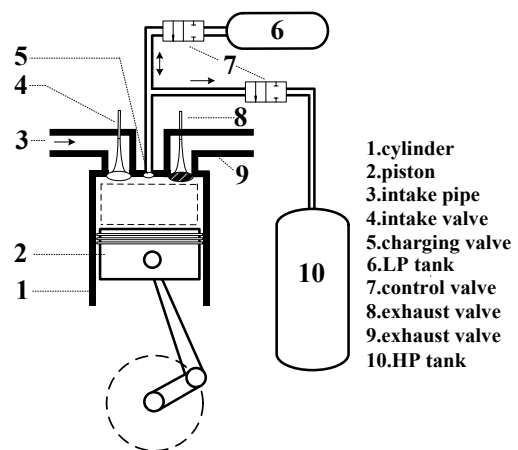

**Fig.2.** Schematic diagram of a double-tank HPE system

Figure 1 shows a schematic diagram of a one-tank hybrid pneumatic engine system. The engine cylinder is modified by adding a charging valve on the cylinder head which is connected to the air tank. Four modes, including the ICE mode, the compression mode, the air motor mode and the supercharging mode, can be achieved by controlling the fuel injection and the opening and closing times of the valves. Based on this configuration, a double-tank hybrid pneumatic engine system (Figure 2), with one low pressure (LP) tank and one high pressure (HP) tank, is proposed to further improve the amount of the compressed air that can be recovered in the tank, meanwhile to achieve a better braking effect.

Three ideal compression cycle scenarios for the double-tank hybrid pneumatic engine system are shown in Figure 3. As a comparison, the ideal compression cycle scenario for the one-tank system is also presented (Figure 3 (a)). Detailed working processes are defined as follows:

Scenario 1: 1-2: Intake valve opens and atmosphere air is sucked into the cylinder till the Bottom Dead Center (BDC); 2-3: Air is compressed in the cylinder; 3-4: Charging valve and the control valve open, the pressurized air is charged into the air tank till the Top Dead Center (TDC); 4-1: Both the charging valve and the intake valve are closed and the residual air in the cylinder expands to the atmosphere pressure.

Scenario 2: On the basis of working process of scenario 1, an air charged into the LP tank process 4-5 is added. 4-5: The HP control valve closes and the LP tank control valve opens, the remaining pressurized air is charged into the LP tank till the cylinder pressure equals to the LP tank pressure.

Scenario 3: An air from the LP tank injected into the cylinder process 2-3 is added based on scenario 2. 2-3: Intake valve closes, charging valve and the LP tank control valve open, compressed air from the LP tank enters the cylinder till the cylinder pressure equals to the LP tank pressure.

Scenario 4: Two cycles as in scenario 1 operate in turn. In the first 1-2-3-4-1 cycle, atmosphere air is sucked into the cylinder, and the pressurized air is charged into the LP tank. While in the second 1'-2'-3'-4'-1' cycle, the air of the LP tank is taken as the air supply, and the higher pressurized air is charged into the HP tank.

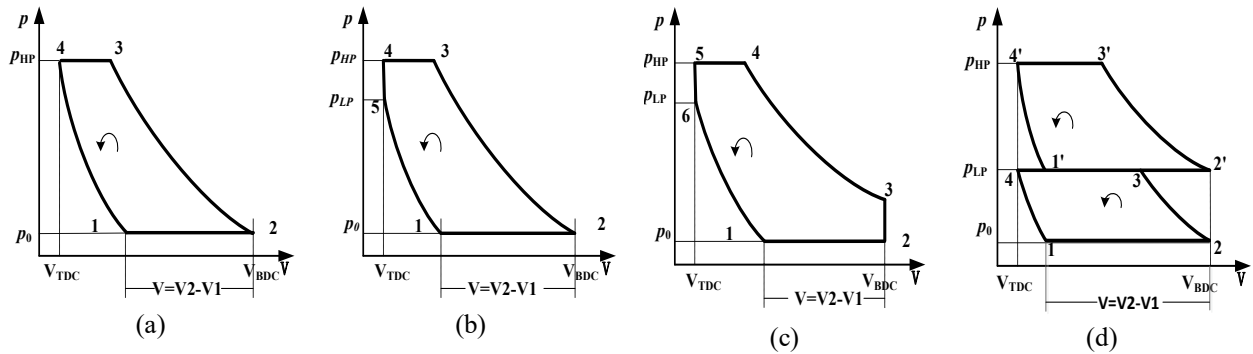


Fig. 3. Scenarios of ideal compression cycle (a) Scenario 1; (b) Scenario 2; (c) Scenario 3; (d) Scenario 4

### 3. Evaluation methods

Thermodynamic analysis has been applied to the above four compression cycle scenarios, underlying the following assumptions.

1. Air is an ideal and calorically perfect gas, and the state parameters distributes uniformly.
2. Opening and closing times as well as flow restrictions of the valves are neglected.
3. Both the cylinder and tanks are considered as adiabatic.
4. The volumes of the tanks are far greater than the cylinder-swept volume. The tank pressure and temperature changes during one cycle are therefore neglected.

Considering that the concept of hybrid pneumatic is proposed to fulfil the requirement of braking energy recovery and braking power output, three performance indicators of the thermodynamic cycles are selected for evaluating and comparing the four scenarios, as listed in Table 1.

Brake Mean Effective Pressure (*BMEP*)  $P_{bmeP}$  is the work expended in one compression cycle  $W$  divided by displacement volume  $V_d$ , which can reflect the braking ability of the hybrid pneumatic system. Mass of compressed air recovered per cycle  $\Delta m$  is the total of compressed air recovered by the LP tank  $\Delta m_{LP}$  and the HP tank  $\Delta m_{HP}$ . Energy conversion efficiency expressed by *COP* equals to the energy of compressed air recovered  $\Delta H$  divided by the work expended  $W$  [14]. Mass recovered per cycle  $\Delta m$  and energy conversion efficiency *COP* can be used to demonstrate the hybrid system's energy recovery ability.

The parameters of the geometric model built to calculate these performance indicators are listed in Table 2.

**Table 1.** Performance indicators


Indicator	Calculation equation
Brake Mean Effective Pressure ( <i>BMEP</i> )	$BMEP = -W/V_d$
Mass of compressed air recovered per cycle ( $\Delta m$ )	$\Delta m = \Delta m_{LP} + \Delta m_{HP}$
Energy conversion efficiency ( <i>COP</i> )	$COP = -\Delta H/W$

**Table 2.** Modified engine parameter

Name	Value
Engine type	290F
Cylinder bore	90mm
Cylinder stroke	75mm
Single-cylinder displacement	477cm <sup>3</sup>
Original compression ratio	19:1
Ratio of the crank radius to the connecting-rod length	0.333

**4. Results and discussion**

As in the four scenarios, tank pressure is the main effecting factors. Only variation laws of *BMEP*,  $\Delta m$ , and *COP* with tank pressure are evaluated in detail below. Considering that the LP tank pressure is designed to be lower than the HP tank pressure, the ratio of the pressure of the LP tank with the HP tank is introduced as one independent variable. Another independent variable is the HP tank pressure, which only takes three cases of 0.5 MPa, 1.0 MPa, 1.5 MPa into account.

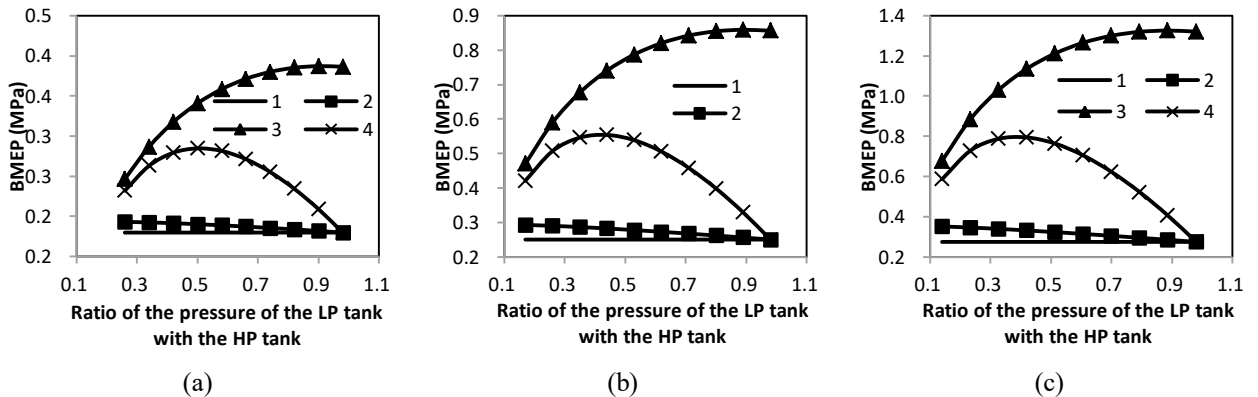


**Fig.4.** Evaluation of BMEP under various LP and HP tank pressure (a) HP=0.5MPa; (b) HP=1.0MPa; (c) HP=1.5MPa

**4.1. Evaluation of Brake Mean Effective Pressure (BMEP)**

The comparison of *BMEP* of the four scenarios is shown in Fig.4. The increase of HP tank pressure can significantly promote *BMEP* of all scenarios which means the braking ability can be improved. All the three scenarios for double-tank can produce more braking power than the ideal one-tank scenario. However, the effect of LP tank pressure is not consistent. Scenario 3 performs the best braking ability among all scenarios under the same conditions. The maximum value, which can reach not over 0.2 MPa less than the HP tank pressure, occurs when the ratio of the pressure of the LP tank with the HP tank is around 0.9.


**4.2. Evaluation of total air mass**

Different from the variation laws of *BMEP*, the higher the HP or LP tank pressure is, the less the total air can be recovered. As can be seen in Fig.5, the highest improvement of  $\Delta m$  in the double-tank scenarios compared with that in the one-tank scenario can reach over 40%. However, there is no difference among the three scenarios under the same HP tank pressure.

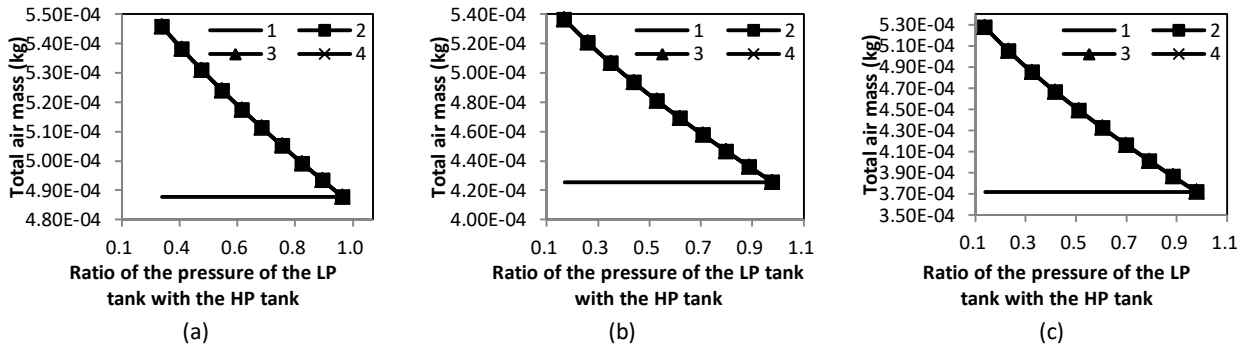


**Fig.5.** Evaluation of total mass recovered per cycle under various LP and HP tank pressure  
 (a) HP=0.5MPa; (b) HP=1.0MPa; (c) HP=1.5MPa

Thus the air mass of LP tank and HP tank recovered per cycle are also presented in Fig.6 and Fig.7, respectively. Scenario 2 is the only scenario that can increase but not consume the air of LP tank, and the air recovered of HP tank is same to that of the ideal one-tank scenario. Air recovered of HP tank in scenario 3 and 4 increases greatly with increasing HP or LP tank pressure, while air consumed from LP tank increases greatly, too. Scenario 4 shows the greatest potential among the three double-tank scenarios of 1.4 to 22 times as much HP air amount recovered as that in the one-tank scenario 1. But if air sources of LP tank are taken into consideration, scenario 2 is the only one that can operate independently without other air complements.

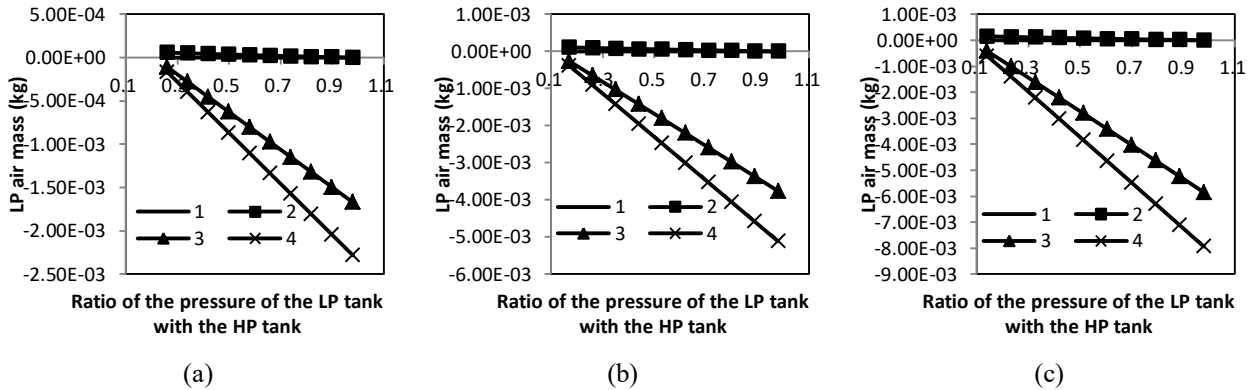

**Fig.6.** Evaluation of LP air mass recovered per cycle under various LP and HP tank pressure  
 (a) HP=0.5MPa; (b) HP=1.0MPa; (c) HP=1.5MPa

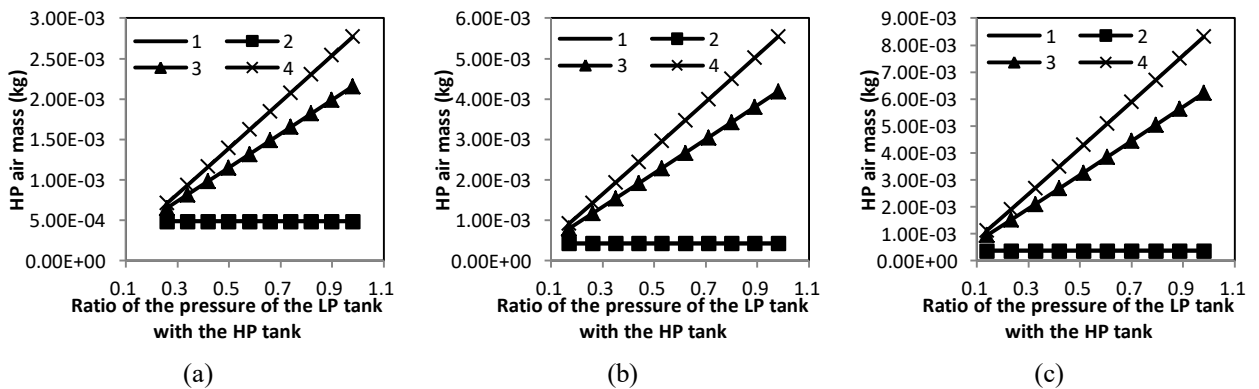

**Fig.7.** Evaluation of HP air mass recovered per cycle under various LP and HP tank pressure  
 (a) HP=0.5MPa; (b) HP=1.0MPa; (c) HP=1.5MPa.

### 4.3. Evaluation of COP

Results in Fig.8 indicate the double-tank scenarios cannot do any favour to the improvements of energy conversion efficiency  $COP$ . And  $COP$  of all double-tank scenarios shows a variation law of first decreasing and then increasing when the LP tank pressure increases. The poorest performances occur when the ratio of the pressure of the LP tank with the HP tank is about 0.3 to 0.5. Scenario 2 shows a better energy conversion performance compared with the other two double-tank scenarios, which is close to the ideal one-tank scenario.

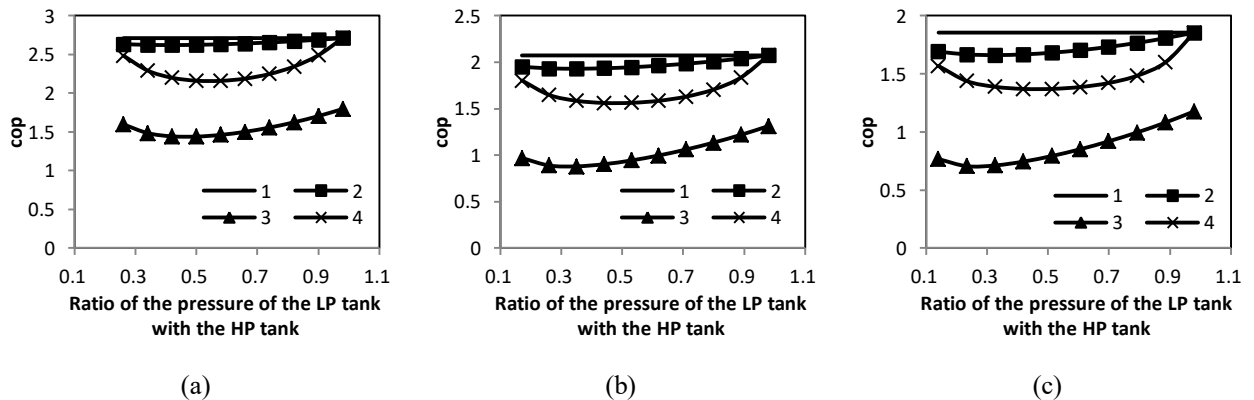


Fig.8. Evaluation of COP under various LP and HP tank pressure (a) HP=0.5MPa; (b) HP=1.0MPa; (c) HP=1.5MPa

## 5. Conclusions

This paper proposes three ideal double-tank compression cycle scenarios for the hybrid pneumatic engine system and reports the thermodynamics cycle analysis and comparisons results. The cycle performance evaluating, including brake mean effective pressure  $BMEP$ , mass of compressed air recovered per cycle  $\Delta m$  and Energy conversion efficiency  $COP$ , are conducted in order to identify the optimal compression cycle under the different primary requirement of improving the braking energy recovery or braking power output. Main conclusions can be drawn as follows

1. The introduction of double-tank compression cycle can help to improve the braking power output and the total air mass recovered of the hybrid pneumatic system. However, the energy conversion efficiency cannot be improved. The highest improvement of  $\Delta m$  in the double-tank scenarios compared with that in the one-tank scenario can reach over 40%.

2. Scenario 3 performs the best braking ability among all scenarios, which can reach not over 0.2 MPa less than the HP tank pressure. Scenario 4 shows the greatest potential of 1.4 to 22 times as much HP air amount recovered as that in the one-tank scenario 1. If air sources of LP tank are taken into consideration, scenario 2 is the only one that can operate independently without other air complements. At the same time, scenario 2 also performs the best at the energy conversion efficiency among the three double-tank scenarios, which is close to the ideal one-tank scenario.

3. Optimal braking ability and optimal braking energy recovery ability cannot occur on the same compression cycle scenario, and cannot occur under the same tank pressure conditions, either. In an actual application, the choices of the compression cycle scenarios must have their own emphasis according to the requirement of the hybrid pneumatic system.

## Acknowledgements

This work was supported by the National Natural Science Foundation of China (grant number 51476143) and State Key Laboratory of Clean Energy Utilization of China, No. ZJUCEU2016005. The authors also would like to thank the support from NSFC-RS Joint Project under the grant number No. 5151101443 and IE/151256.

## References

- [1] M.A. Hannan, F.A. Azidin, A. Mohamed, Hybrid electric vehicles and their challenges: A review, *Renewable and Sustainable Energy Reviews*, 29 (2014) 135-150.
- [2] A. Dhand, K. Pullen, Review of flywheel based internal combustion engine hybrid vehicles, *International Journal of Automotive Technology*, 14 (2013) 797-804.
- [3] B. Wu, C.-C. Lin, Z. Filipi, H. Peng, D. Assanis, Optimal Power Management for a Hydraulic Hybrid Delivery Truck, *Vehicle System Dynamics*, 42 (2004) 23-40.
- [4] F. Wasbari, R.A. Bakar, L.M. Gan, M.M. Tahir, A.A. Yusof, A review of compressed-air hybrid technology in vehicle system, *Renewable and Sustainable Energy Reviews*, 67 (2017) 935-953.
- [5] L. Wang, D. Li, H. Xu, Z. Fan, W. Dou, X. Yu, Research on a pneumatic hybrid engine with regenerative braking and compressed-air-assisted cranking, *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering*, 230 (2016) 406-422.
- [6] T.L. Brown, V.P. Atluri, J.P. Schmiedeler, A low-cost hybrid drivetrain concept based on compressed air energy storage, *Applied Energy*, 134 (2014) 477-489.
- [7] H. Zhao, C. Psanis, T. Ma, J. Turner, R. Pearson, Theoretical and experimental studies of air-hybrid engine operation with fully variable valve actuation, *International Journal of Engine Research*, 12 (2011) 527-548.
- [8] T. Basbous, R. Younes, A. Ilinca, J. Perron, Required time response of a variable valve actuator equipping a hybrid pneumatic-combustion engine, *International Journal of Engine Research*, 13 (2012) 514-528.
- [9] C. Dönitz, C. Voser, I. Vasile, C. Onder, L. Guzzella, Validation of the Fuel Saving Potential of Downsized and Supercharged Hybrid Pneumatic Engines Using Vehicle Emulation Experiments, *Journal of Engineering for Gas Turbines and Power*, 133 (2011) 092801-092801-092813.
- [10] T. Basbous, R. Younes, A. Ilinca, J. Perron, Fuel consumption evaluation of an optimized new hybrid pneumatic-combustion vehicle engine on several driving cycles, *International Journal of Engine Research*, 13 (2012) 253-273.
- [11] Z. Dimitrova, F. Maréchal, Gasoline hybrid pneumatic engine for efficient vehicle powertrain hybridization, *Applied Energy*, 151 (2015) 168-177.
- [12] M. Andersson, B. Johansson, A. Hultqvist, An Air Hybrid for High Power Absorption and Discharge, in, *SAE International*, 2005.
- [13] A. Fazeli, A. Khajepour, C. Devaud, A novel compression strategy for air hybrid engines, *Applied Energy*, 88 (2011) 2955-2966.
- [14] C. Dönitz, I. Vasile, C. Onder, L. Guzzella, Realizing a Concept for High Efficiency and Excellent Driveability: The Downsized and Supercharged Hybrid Pneumatic Engine, in, *SAE International*, 2009.